

## Fixed Inductors - 680 Series


## Ferrite Core Fixed Inductors with Radial Leads 680 Series

Data sheet Ref: APS-104 (16/12/03)

Inductance $\mu\text{H} \pm 10\%$	DC Current Amps (Continuous)	Typical DC Resistance $\Omega$
10	1.80	0.040
15	1.50	0.055
22	1.20	0.075
33	1.00	0.100
47	0.90	0.160
68	0.85	0.240
100	0.75	0.310
150	0.60	0.450
220	0.50	0.700
330	0.40	0.910
470	0.35	1.350
680	0.30	2.000
1000	0.20	3.300

**PACE**  
COMPONENTS

The DC current rating is the current at which the inductance falls to 90% of nominal

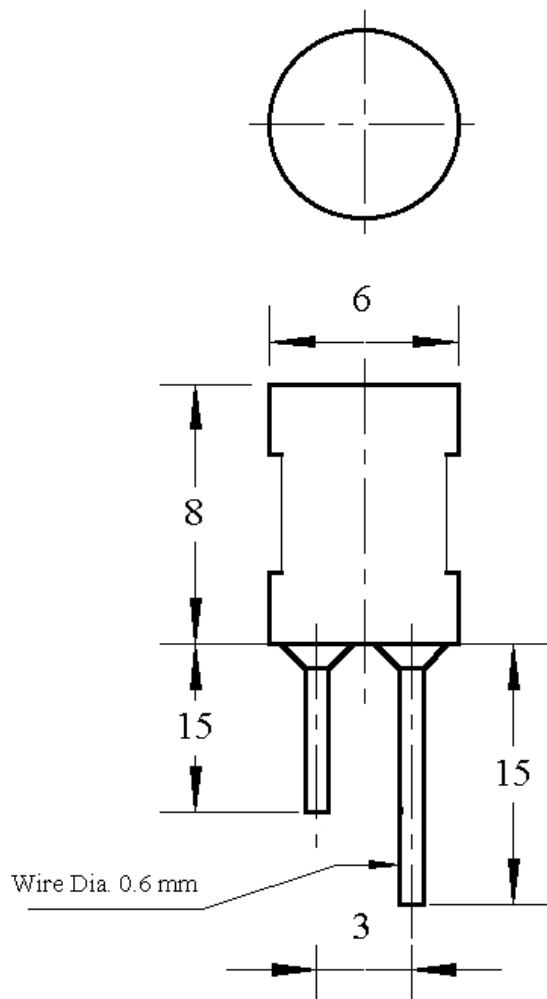

All dimensions in mm



### Pace Components Ltd

Unit 38 Ballmoor  
Buckingham Industrial Park  
Buckingham MK18 1RQ

T 01280 822733

F 01280 823839

E [sales@pacecomponents.co.uk](mailto:sales@pacecomponents.co.uk)  
[www.pacecomponents.co.uk](http://www.pacecomponents.co.uk)

INCORPORATING  
**PACE**  
POWER MAGNETICS  
DIVISION